


Covington ATCT Concrete panels and joints. Remove existing grout and replace with sealant along vertical joints.





Inside ATCT Shaft showing evidence of water intrusion

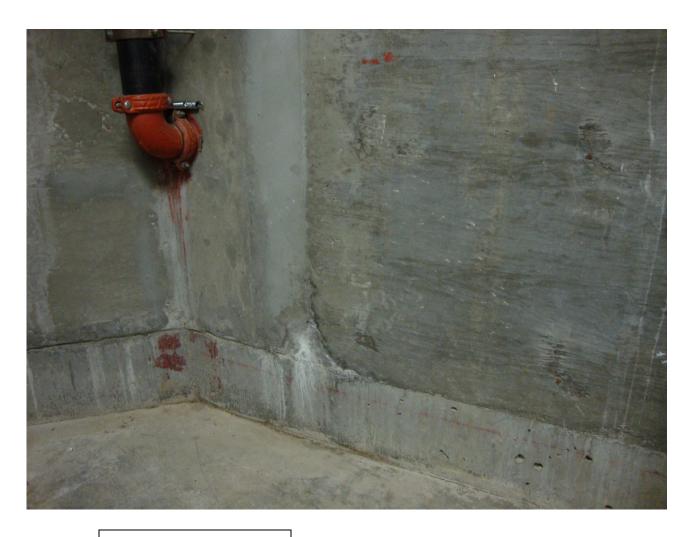





Remove all plastic from walls below stairwell. Add drywall to metal studs and enclose area that has been cleaned of mold.



